

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH0703 SERIES

FEATURES:

- Shielded Structure
- Flat-top for pick and place
- Low Resistance Allow high Current
- Excellent Thermal Stability
- Low profile

APPLICATIONS:

- Ideal for a variety of DC-DC converter Inductors Applications.
- DC/DC converter
- Power supplies for portable communication equipment
- LCD, TV, PDA, PDP
- Notebook computer




STANDARD SPECIFICATION:

Part Number	Marking	Inductance L(μH) @10KHz,0.1V	DCR(Ω)	IDC(A)
SDRH0703-100□	100	10	0.076	1.68
SDRH0703-120□	120	12	0.098	1.52
SDRH0703-150□	150	15	0.15	1.33
SDRH0703-180□	180	18	0.17	1.20
SDRH0703-220□	220	22	0.19	1.07
SDRH0703-270□	270	27	0.23	0.96
SDRH0703-330□	330	33	0.28	0.91
SDRH0703-390□	390	39	0.34	0.77
SDRH0703-470□	470	47	0.36	0.76
SDRH0703-560□	560	56	0.47	0.68
SDRH0703-680□	680	68	0.52	0.61
SDRH0703-820□	820	82	0.69	0.57
SDRH0703-101□	101	100	0.79	0.50
SDRH0703-121□	121	120	0.89	0.49
SDRH0703-151□	151	150	1.27	0.43
SDRH0703-181□	181	180	1.45	0.39
SDRH0703-221□	221	220	1.65	0.35
SDRH0703-271□	271	270	2.31	0.32
SDRH0703-331□	331	330	2.62	0.28
SDRH0703-391□	391	390	2.94	0.26
SDRH0703-471□	471	470	4.18	0.24
SDRH0703-561□	561	560	4.67	0.22
SDRH0703-681□	681	680	5.73	0.19
SDRH0703-821□	821	820	6.54	0.18
SDRH0703-102□	102	1000	9.44	0.16

□ K=10%,M=20%

PHYSICAL CHARACTERISTICS:

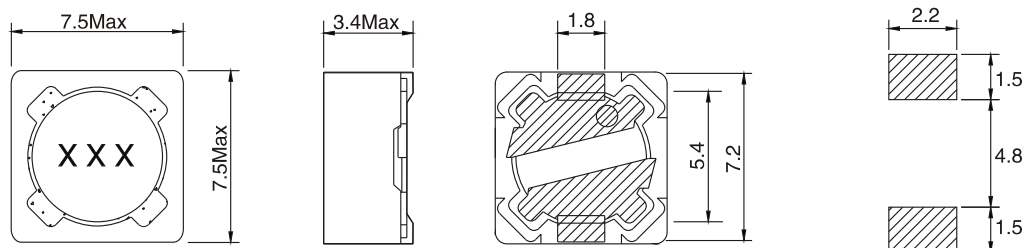

Test Equipment and Conditions

- ◆ Inductance is measured with HP-4284A LCR meter or equivalent.
- ◆ Maximum allowable DC current is that which causes a 25% inductance reduction of the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C)
- ◆ Operating temperature: -25°C~+85°C.